



Comparison of Low-temperature District Heating Concepts in a Long-Term Energy System Perspective

Lund, Rasmus Søgaard; Østergaard, Dorte Skaarup; Yang, Xiaochen; Mathiesen, Brian Vad

Published in:

International Journal of Sustainable Energy Planning and Management

Publication date:

2017

Document Version

Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Lund, R. S., Østergaard, D. S., Yang, X., & Mathiesen, B. V. (2017). Comparison of Low-temperature District Heating Concepts in a Long-Term Energy System Perspective. *International Journal of Sustainable Energy Planning and Management*, 12, 5-18.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Comparison of Low-temperature District Heating Concepts in a Long-Term Energy System Perspective

Rasmus Lund¹, Dorte Skaarup Østergaard², Xiaochen Yang², Brian Vad Mathiesen¹

¹Aalborg University, Department of Planning, A. C. Meyers Vænge 15, 2450 Copenhagen, Denmark

²Technical University of Denmark, Department of Civil Engineering, Brovej Building 118, 2800 Kgs. Lyngby, Denmark

Abstract

District heating (DH) systems are important components in an energy efficient heat supply. With increasing amounts of renewable energy, the foundation for DH is changing and the approach to its planning will have to change. Reduced temperatures of DH are proposed as a solution to adapt it to future renewable energy systems. This study compares three alternative concepts for DH temperature level: Low temperature (55/25 °C), Ultra-low temperature with electric boosting (45/25 °C), and Ultra-low temperature with heat pump boosting (35/20 °C) taking into account the grid losses, production efficiencies and building requirements. The scenarios are modelled and analysed in the analysis tool EnergyPLAN and compared on primary energy supply and socioeconomic costs. The results show that the low temperature solution (55/25 °C) has the lowest costs, reducing the total costs by about 100 M€/year in 2050.

Keywords

Energy system analysis

Socioeconomic costs

Fuel consumption

Energy efficiency

EnergyPLAN simulations

Abbreviations

COP	Coefficient of performance
DEA	Danish Energy Agency
DH	District heating
DHW	Domestic hot water
HP(s)	Heat pump(s)
IDA	The Danish Society of Engineers
LTDH	Low-temperature district heating
PES	Primary Energy Supply
RE	Renewable energy
SH	Space heating

1. Introduction

Existing district heating (DH) systems and organisations are challenged by the transition towards 100% renewable energy (RE) supply [1]. The RE sources are variable in time which is different from the conventional heat supply based on fossil fuels that can be combusted according to the demand. This is not only the case for DH, but for all energy sectors (electricity, transport, industry etc.), and a holistic approach including all sectors is needed to develop an efficient energy supply in the context of 100% RE [2].

At the same time heat savings are implemented in the building stock and new buildings are of much better energy standards than the old ones, which will reduce the heat demand density and thereby further challenge the existing DH supply. Also the economic framework for DH production will change, as RE to a larger extent is based on investment costs rather than fuel consumption [3].

The 4th generation of DH (4DH) is a framework in which solutions for these challenges can be developed. 4DH emphasises the need to integrate DH more with other energy sectors, by introducing new heat sources and conversion technologies that utilise synergies between the sectors. It is also a key element that the temperature levels of DH supply generally should be reduced to improve production efficiencies and reduce grid losses [1].

1.1. Low-temperature District Heating

A number of studies have investigated the concept of low-temperature district heating (LTDH) and aspects of this including benefits, challenges, costs and possible future technological solutions.

In [4] Dalla Rosa et al. model a DH system in Canada in detail comparing different temperature sets, concluding that supply temperatures reduced towards 70 °C from above 100 °C is a feasible solution, whereas lower temperature sets (below 60 °C) depend on the achievable system benefits because of increased costs. Similar tendencies are found by Ommen et al. [5] for the heat and electricity systems of Greater Copenhagen. Here, supply temperatures below a level where electric boosting of domestic hot water (DHW) become necessary, are found not to be feasible in terms of consumer costs.

Baldvinsson and Nakata compare in [6] medium temperature DH with LTDH, LTDH with low heat demand and a combination of medium temperature DH and LTDH in a cascading system, for a specific mixed urban area in Japan. It is found that in a system with normal heat demand LTDH is not feasible, compared to LTDH combined with low heat demand which is feasible. For the latter, the optimal plant supply temperature level is found to be around 52 °C in general with temperature boosting up to 65 °C in the winter. In another study on LTDH for some very different case areas in Austria, the energy, economy and ecology are assessed for scenarios with different temperature configurations, some with electric DHW temperature boosting and some without [7]. The results show to be different for the different cases, but generally conclude that the availability of low temperature heat sources to the DH system is important.

Among the challenges of implementing LTDH is the need for reduced return temperature to maintain a good temperature difference between supply and return. Gadd and Werner present in [8] a method for fault detection in DH substations to avoid high return temperature using the temperature difference as indicator. If the return temperature cannot be sufficiently reduced, the pipe dimensions or pumping costs will increase to cover the same heating demand. Tol and Svendsen describe in [9] a method to dimension the pipe system in LTDH systems in an optimal way introducing temperature boosting in peak demand times, and thereby keeping pipe dimensions and heat losses to a minimum.

Another challenge is the sufficiency of the supply temperature to meet heat demands in the buildings. Østergaard and Svendsen indicate in [10], based on simulation of typical building types, that it is feasible to provide space heating (SH) to even old buildings, that have been energy refurbished, using DH supply temperatures below 50 °C. The DHW is more complicated because of the risk of legionella infection. Yang et al. present in [11] a number of solutions for prevention of legionella infection in the DHW supply. These include temperature boosting using electricity, limitation of DHW volume using instantaneous heat exchangers and different sterilization methods. Furthermore, Yang et al. [12] assess different DHW preparation methods for supply temperatures below 45 °C using direct electric heating or HP boosting to a sufficient temperature level. Østergaard and Andersen [13] even consider a supply temperature as low as around 35 °C, using a booster HP, which is also indicated on the basis of the demonstration project in [14]. Electricity consumption for heating is generally not an efficient solution in a system perspective [15] which is also found in [16], but might provide a new picture when combined with temperature reductions in DH.

No studies have so far analysed the temperature level on a large scale energy system level from a societal point of view, which is necessary to provide more general recommendations.

1.2. Long-term Energy System Analysis

In this study five scenarios describing five concepts of DH with a focus on different temperature levels are chosen and the costs and benefits of each of these are assessed. The study will have its point of departure in a Danish context analysing the scenarios implemented into holistic energy models of Denmark for 2035 and 2050 developed in the IDA Energy Vision project where scenarios from the Danish Energy Agency (DEA) are used as reference. Here, the "Wind" scenario is most similar to the IDA scenario [17]. This study indicates, by socioeconomy and fuel consumption, which DH concept generally fits best into a future RE system in Denmark, and thereby contributes to how DH can be seen in the overall strategy and planning for the Danish energy sector.

For this study, a number of concepts within LTDH is identified on characteristics of the temperature set and means for DHW preparation with a conventional temperature set as reference. These are presented in Table 1. These concepts are further defined and put into an energy system context in Chapter 2.

102 *Table 1: Main characteristics of considered concepts for district heating in future energy systems*

	Conventional	Low Return Temp.	Low Temp.	Ultra-Low Temp. (Elec.)	Ultra-Low Temp. (HP)
Nominal supply temperature [°C]	80	80	55	45	35
Nominal return temperature [°C]	40	25	25	25	20
Additional DHW preparation method	-	-	-	Direct electric	Booster heat pump

103

104 In this paper the analysis and results are presented in the three following chapters. In Chapter 1 an
 105 introduction, literature review and background for the area is presented. In Chapter 2 the materials and
 106 methods are presented, first describing the purposes of the different scenarios followed by details on the
 107 assumed differences between the scenarios. The results of the analyses are presented in Chapter 3 and
 108 in Chapter 4 results and the implications of these are discussed comparing them with previous findings.

109 2. Materials and Methods

110 The scenarios, characterising different DH concepts, use existing models of the energy system in
 111 Denmark for 2035 and 2050, implementing changes in these consequent to the change of temperature
 112 assumption. The changes include grid losses, energy production and conversion efficiencies, potential
 113 utilisation of heat sources and investment costs in buildings and the supply system.

114 2.1. Analysed Scenarios

115 The analysed scenarios are based on the scenarios designed in the project IDA Energy Vision [17] for
 116 2035 and 2050. These scenarios assume some degree of reduced temperature in the DH systems, but no
 117 specific temperatures are mentioned. Here, it is assumed that the IDA scenarios are equivalent to the
 118 Low temperature scenario (55/25) of the present study, and the dependent parameters are calculated for
 119 the other scenarios based on this. The analysed scenarios can be seen as a stepwise progression in
 120 reduction of temperatures and interventions in the buildings. They are briefly described below:

- 121 • **Heat savings** (Save) serves as a reference for the other scenarios and represents a situation
 122 where savings in space heating have been implemented (as for all the five scenarios) but the DH
 123 temperatures are kept at a conventional level. This is done because savings in heat demand is a
 124 prerequisite for reducing the temperatures in a feasible way.
- 125 • **Low return temperature** (Return) represents a situation where implementation of building
 126 improvements to reduce the return temperature is performed while keeping the conventional
 127 supply temperature. The purpose of the scenario is to show the relevance of reducing the return
 128 temperature.
- 129 • **Low temperature** (Low) represents a situation where both supply and return temperatures are
 130 reduced to the lowest possible level where no electric boosting of DHW in the buildings is
 131 necessary.
- 132 • **Ultra-low temperature using direct electric boosting** (Ultra) represents a situation where
 133 the supply temperature is further reduced, making temperature boosting of the DHW necessary,
 134 here done using direct electric heaters.
- 135 • **Ultra-low temperature using heat pump boosting** (HP) represents a situation where the
 136 supply and return temperatures are further reduced, here using micro HPs to boost the DHW
 137 temperature as needed. This scenario is based on more assumptions and simulated data
 138 compared to the others for which better data is available.

139 2.1.1. Domestic Hot Water Preparation

140 In the three first scenarios it is assumed that the preparation of DHW is solely done with an
 141 instantaneous heat exchanger, whereas in the scenarios Ultra and HP, electric boosting is needed to
 142 provide a comfortable DHW supply limiting the risk for legionella. All scenarios are designed to be able to
 143 meet the same comfort and hygienic requirements [12].

144 In the Ultra scenario electricity is consumed in an electric heater in the DHW system of the building.
145 Here, the water is heated according to the official comfort requirements of 45 °C, after preheat by DH.
146 The hygienic requirements, to avoid legionella are not compromised in this way because the water is
147 heated instantaneously. In cases with long internal pipe systems it may be needed to use electric tracing
148 [18]. The electricity consumption is assumed to be 14% of the DHW demand [12], and since this
149 electricity is heating the DHW it is assumed to replace an equivalent amount of the heat supply from DH.

150 In the HP scenario the electricity consumption is for the compressor in the HP. The heat pump is placed in
151 a separate circuit with a storage tank and a heat exchanger connected to cold usage water. The water is
152 stored at 50 °C to be able to meet comfort requirements after the heat exchanger. This is done to reduce
153 the needed capacity of the booster heat pump and the frequency of on/off switches. Here, as well, the
154 hygienic requirements are not compromised because the DHW is produced instantaneously on demand.
155 The temperature has to be raised more than in the Ultra scenario because of the lower supply
156 temperature and storage requirement, but because of the COP of the HP the electricity consumption is at
157 the same level. It is here assumed to be 16% of the DHW demand, based on data from [13] provided by
158 the authors, in which the used booster HPs are presented and discussed. The COP of these varies from
159 5.5 to 7.5 during the year.

160 The electricity demands in the Ultra and HP scenarios are distributed according to the variations in DHW
161 demand. In the HP scenario, where individual thermal storages are integrated, it may be possible to use
162 the HPs intelligently, but compared to the household HPs for heating, these booster HPs are small in
163 capacity and the effect will be small [19].

164 2.1.2. Additional costs

165 When comparing the scenarios, a number of cost assumption related to the differences in the scenarios
166 are made. The three categories and the specific cost assumptions made can be seen in Table 2.

167 To reduce the return temperature from the majority of buildings, some replacements of valves and
168 radiators will be required, which is estimated in [20] to be approximately 10,000 DKK (1,300 €) per
169 building. For the calculation of the total additional costs it is assumed that the replacement of valves and
170 radiators will be done on average 10% before the end of their technical lifetime or have equally higher
171 investment costs than standard devices.

172 The electric heater is today available in retail, but as an independent unit supplementary to the DH
173 substation. The model used in [12] can be purchased for approximately 900€ [21]. If the Ultra scenario is
174 implemented in a larger scale, it can be assumed that the unit will be sold in larger numbers and be an
175 integrated part of the DH substation, reducing the costs. It is here assumed that the unit cost can be
176 reduced to 220€ (one third of the cost for the micro HP).

177 The micro booster HP is not available today in retail, but the units have been developed for a
178 demonstration project in single family houses, where the additional cost for the HP unit is 15,000 DKK
179 (2,000 €) [14]. The HP is here an integrated part of a DH substation, but it is assumed that the cost can
180 be reduced to 670 € (one third of the demonstration unit cost) accounting for the potential benefit in
181 multifamily buildings and the economy of scale in the production of larger quantities. The sensitivity of
182 the results to these assumptions are discussed in Section 4.3.

183 The different scenarios have different average temperature differences between supply and return, which
184 means that a different flow rate is required to deliver the same amount of heat. On the short term, this
185 will mean different flow and cost for pumping, but on the long term it is assumed that these changes will
186 be evened out by using more appropriate pipe dimensions. This is also indicated in [7] and [4]. It is in
187 general assumed that the DH grid is replaced gradually and the differences in costs will therefore only be
188 related to the dimensions of the pipe networks, because the replacement will be done at some point
189 anyway. Therefore, based on the relative changes in temperature difference, the total pipe costs are
190 assumed to change according to the rates seen in Table 2. The total DH grid costs are estimated based
191 on the method presented in [22]. It is assumed that the insulation standard in 2035 is an average of
192 Series 2 and 3 whereas in 2050 it assumed to be an average of Series 3 and 4 due to gradual
193 improvement of pipe insulation standard towards 2050.

The values of total annualised costs in Table 2 are calculated based on the total investment cost, the technical lifetime of investments and a discount rate (See Section 2.3). Valves, radiators, electric heater and micro HPs are assumed to have technical lifetimes of 20 years, whereas the DH grid is assumed to have a technical life time of 40 years [23].

Table 2: Assumptions on additional costs for the different scenarios.

Category	Parameter	Save	Return	Low	Ultra	HP
1. Valves and radiators	Replacement [€/building]	0	130	130	130	130
	Total annualised cost [M€/year]	0	19	19	19	19
2. DHW heater / micro booster HP	Investment [€/building]	-	-	-	220	670
	Total annualised cost [M€/year]	-	-	-	37	112
3. DH grid costs	Total DH grid costs [B€]	20.1	20.0	20.3	20.5	20.7
	Change in grid costs [%]	-1.0	-1.5	-	1.0	2.0
	Total annualised cost [M€/year]	869	865	878	887	896

2.2. The EnergyPLAN Analysis Tool

EnergyPLAN is an advanced energy system analysis tool developed for analysis of large scale energy system dynamics which allows for modelling of 100% RE. It is a simulation tool that calculates one full year on an hourly time resolution. Special focus is on the integration of the different energy sectors: electricity, heating, transport, and industry and the dynamics between these on an hourly basis. EnergyPLAN has also been applied in [3], [17], [22] and [24] for modelling of 100% RE systems. A complete documentation of this can be found in [25].

For this analysis, a modified version of EnergyPLAN has been developed where version 12.4 has been used as a starting point. The modification changes the input type of the COP for HPs in DH from a fixed value to an hourly time-dependent input. This is done to reflect the changes in COP when the supply and return temperatures and the temperature of the heat source are changed.

2.3. Socioeconomic Cost Calculation

The socioeconomic costs are calculated as total annual costs for the given energy system including annualised investments costs, fuel costs, variable and fixed operation and maintenance costs and CO₂-emission costs. The investments are annualised using a discount rate of 3%. Public economic measurements as taxes, levies, subsidies etc. are not included in the socioeconomic costs.

2.4. Application of Temperature Profiles

The temperature levels of DH systems are not constant from hour to hour or month to month, e.g. due to compensation for demand fluctuation. These changes may have an influence on the system benefits of low temperature DH. Therefore, parameters sensitive to DH temperature changes have been calculated with an hourly time resolution based on temperature profiles.

Temperature measurements from the Danish Rindum DH plant from 2015, provided by the plant manager, have been used to calculate temperature profiles for Heat Savings, Low Return, Low temperature and Ultra-low temperature scenarios. For the HP scenario, simulated data from [13] have been used to calculate the hourly profiles.

Table 3 shows the assumed average temperature levels in the DH systems for the high heating season (November-April), and low heating season (May-October). The temperatures are not calculated dynamically, but the measured profiles are scaled to meet the level seen in the table. This means that the return temperatures are not depending on the supply temperatures.


The resulting temperature profiles are shown in Figure 1 and Figure 2. Figure 2 shows the profile of the 20 °C return temperature has a different tendency than the two others. This is caused by the ability of the booster HP in this scenario to decrease the return temperature in the non-heating season further than the output of the SH system.

The temperature profiles have been used to calculate hourly heat losses, COP of HPs and efficiency of solar thermal production. The details of how the temperatures have been applied to calculate these inputs are described further in Sections 2.5 and 2.6.

236 Table 3: Average temperature levels in the scenarios for the high and low heating seasons


[°C]	Save.	Return	Low	Ultra	HP
Supply temperature – heating season	80	80	58	45	35
Return temperature – heating season	40	25	25	25	20
Supply temperature – low heating season	73	73	54	41	30
Return temperature – low heating season	42	26	26	26	18

237

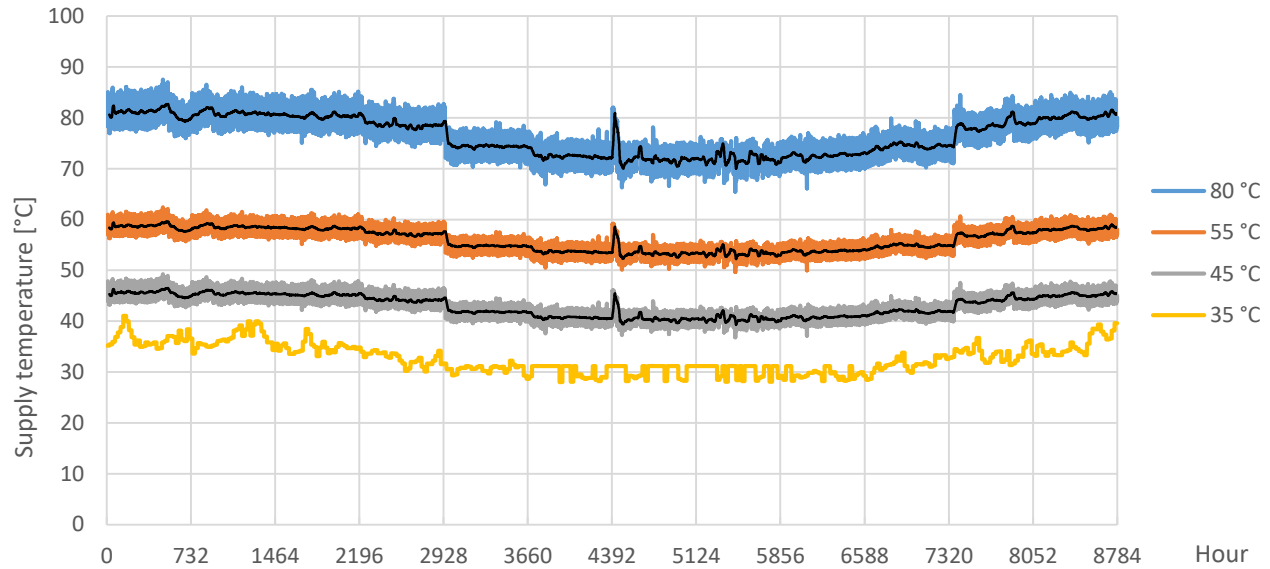

238

239 Figure 1: Hourly supply temperature profiles applied in the analyses. For 80, 55 and 45 °C a 24-hour
240 moving average is added (black lines) to show the general trends.

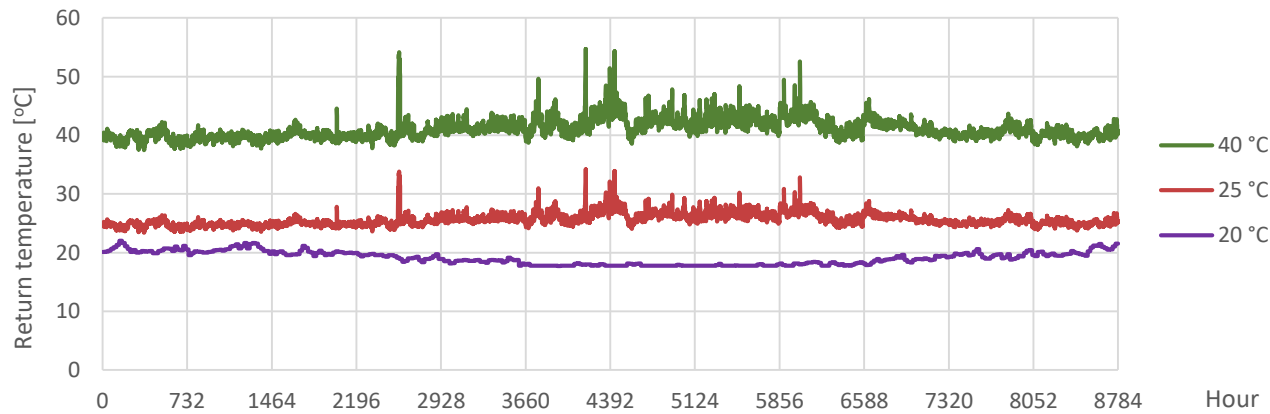

241

242 Figure 2: Hourly return temperature profiles applied in the analyses.

243 2.5. District Heating Demands and Losses

244 The heat demand in DH describes the total demand for heat input to the buildings supplied with DH. This
245 includes SH, DHW and internal heat losses from the HPs in the HP Scenario. The heat demands for the
246 scenarios are calculated based on the figures presented in the *Future Green Buildings* project [26] for the
247 building stock and potential heat savings. It is assumed that 66% of the total heat demand will be
248 covered by DH in 2035 and 2050. Here the total savings in SH in existing buildings are 45% towards
249 2050. The demand in new buildings are 41.3 kWh/m² for SH and 13.7 kWh/m² for DHW.

250 In Table 4 the components of the heat demands are presented. SH and DHW are fixed through all five
251 scenarios, but different between 2035 and 2050 because of continued implementation of heat savings
252 and a general change in the building stock and use. Based on [12] it is assumed that 14% of the DHW

253 demand in the Ultra scenario is covered by electricity. For the HP scenario it is assumed that it has a
 254 thermal storage [13,14] with a heat loss of 10% of the DHW. 50% of the electricity consumption in the
 255 pump (16% of the DHW based on data from [13]) is considered a loss that can be utilised for SH,
 256 corresponding to 50% utilisation of the electricity for the thermodynamic cycle. This is not counted in the
 257 total demand because it is from electricity and therefore in brackets in the table. For the heat losses from
 258 thermal storage and electricity consumption in the HPs, it is assumed that 30% can be utilised in the
 259 building as SH and the rest is lost as increased heat loss from the building, due to location of the HP and
 260 operation during low heating season.

261 The grid losses are calculated based on results from modelling and analysing the flows in a DH network
 262 using the DHM-model applying different pipe insulation series and DH temperature levels [27], [22]. The
 263 grid loss (See Table 4) is distributed to an hourly profile using the supply and return temperatures at
 264 plant level.

265 *Table 4: District heating demand and production composition for the scenarios in 2035 and 2050*

[TWh]	2035					2050				
	Save	Ret	Low	Ultra	HP	Save	Ret	Low	Ultra	HP
Space heating	21.4	21.4	21.4	21.4	21.4	18.4	18.4	18.4	18.4	18.4
Domestic hot water	3.8	3.8	3.8	3.8	3.8	4.3	4.3	4.3	4.3	4.3
Heat from electricity	-	-	-	-0.5	-	-	-	-	-0.6	-
Thermal storage loss	-	-	-	-	0.4	-	-	-	-	0.4
HP heat loss	-	-	-	-	(0.3)	-	-	-	-	(0.3)
Internally utilised loss	-	-	-	-	-0.2	-	-	-	-	-0.2
Total demand	25.2	25.2	25.2	24.7	25.4	22.7	22.7	22.7	22.1	22.8
Total grid loss	5.0	4.7	4.2	3.8	3.6	3.9	3.7	3.2	2.9	2.7
Grid loss / production [%]	16.5	15.8	14.1	13.2	12.3	14.7	14.1	12.4	11.4	10.5
Total production	30.2	29.9	29.4	28.4	28.9	26.5	26.3	25.8	24.9	25.5

266

267 2.6. Efficiency of Energy Conversion Units

268 Most energy conversion units in DH systems depend on the supply and/or return temperatures in the
 269 network. In the following, the included production units whose efficiency are affected by the DH
 270 temperatures are presented and it is explained how their relation to the DH temperatures is included in
 271 the analysis.

272 2.6.1. Condensing boilers

273 Fuel boilers in DH can improve their efficiency by condensing the flue gas from the combustion. The lower
 274 the return temperature received from the grid, the more heat can be extracted from the flue gas. How
 275 much the efficiency can be improved depends on the fuel type and moisture content. Based on [28] it is
 276 assumed that reduced return temperature from 40 °C to 25 °C and 20 °C will improve the average
 277 efficiency of fuel boilers from 0.95 to 1.00 and 1.02 respectively.

278 2.6.2. CHP Plants

279 CHP plants mainly benefit from a reduction in the supply temperature. As the supply temperature from a
 280 CHP plant is lower, the electric efficiency will improve because of a higher total temperature difference. A
 281 Carnot efficiency equation has been used. See Equation 1.

$$282 \quad \eta = 1 - \frac{T_{Low}}{T_{High}} \quad (\text{Equation 1})$$

Here, η is the Carnot efficiency, T_{Low} [K] is the supply temperature and T_{High} [K] is the high temperature in the combustion [29]. T_{High} is here assumed to be 500 °C. The found efficiencies are used to scale the CHP electric efficiencies from the IDA models. The thermal efficiencies of the CHP are reduced corresponding to the increase of the electric efficiency to keep the same overall efficiency.

2.6.3. Heat Pumps

The coefficient of performance (COP) of a HP improves with both supply and return temperature reductions. The calculation of the HP COP is based on a Lorenz cycle. See Equation 2.

$$COP = \eta * \frac{T_{High}}{T_{High} - T_{Low}} \quad (\text{Equation 2})$$

Here, η is the system efficiency of the HP, assumed to be 0.4 (including losses in heat exchangers between HP refrigerant and DH and heat source fluid), T_{High} is the logarithmic mean high temperature in the HP condenser and T_{Low} is the logarithmic mean low temperature of the HP evaporator [13,30]. T_{High} and T_{Low} are defined in Equation 3.

$$T_{High} \text{ or } T_{Low} = \frac{T_{in} - T_{out}}{\ln(T_{in}) - \ln(T_{out})} \quad (\text{Equation 3})$$

Here, T_{in} and T_{out} are the inlet and outlet temperatures of the condenser and the evaporator in the HP. It is assumed that the heat source for the HPs can be cooled 5K.

The COP is calculated for every hour, based on the DH temperature profiles described in Section 2.2 and a heat source profile. The heat source temperature (See Equation 4), should resemble an average of all the utilised heat sources. The seasonal variations are defined by measurements of sea water temperatures from [31]. Other heat sources, such as low-temperature industrial waste heat or sewage water, often have higher temperatures than sea water. Therefore, a constant temperature addition ($K_{Addition}$) is added to the sea water temperature ($T_{Sea\ water}$) to calculate an estimate heat source temperature ($T_{Heat\ source}$).

$$T_{Heat\ source} = T_{Sea\ water} + K_{Addition} \quad (\text{Equation 4})$$

The constant temperature addition ($K_{Addition}$) is different for central DH in the bigger cities compared to the decentral DH in the smaller towns. In the bigger cities, the amount of good heat sources relative to the heat demand is lower than in the smaller towns [32]. The better heat sources with higher temperatures are assumed to be utilised before those with lower temperatures. At some point, a DH company will run out of good heat sources, and they will have to use less efficient heat sources to further expand the heat pump capacity. This point will occur earlier in the bigger cities (central DH) than in the small towns (decentral DH) because of the lower amount of heat sources per demand. This is taken into account by defining $K_{Addition}$ to 10K for the decentral DH, but only 5K in the central DH.

2.6.4. Solar Thermal

The output of solar thermal plants depends on the supply and return temperatures but also the ambient temperature of the solar thermal panels. The bigger the temperature difference between the temperature of the working fluid in the solar panel and the surrounding air, the larger the heat loss and thereby lower efficiency [33]. The relation is shown in Figure 3.

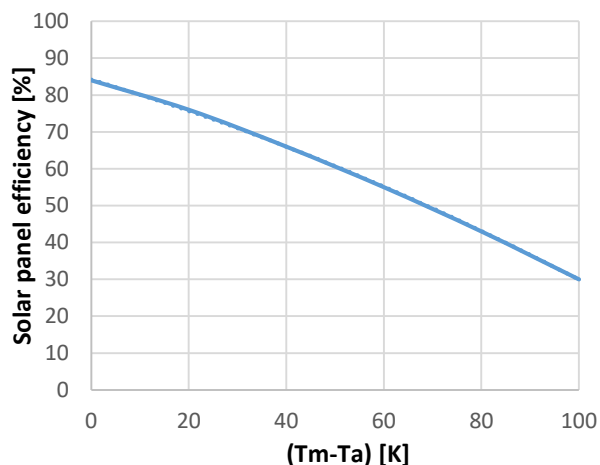


Figure 3: Efficiency of a solar panel as a function of the temperature difference between the medium panel temperature (T_m) and the ambient air temperature (T_a). Derived from [34].

2.6.5. Geothermal

In the Danish context, geothermal resources are only utilised for DH in three locations, and all using absorption HPs. The benefits of lower DH temperatures to the production from geothermal plants are mentioned in several studies, including [1,35]. No quantitative assessment of the potential has been found, though. Here, it has been assumed that a reduced return temperature improves the annual production, as the temperature difference thereby increases by 5% and 7% when reduced to 25 °C and 20 °C respectively. Reduced supply temperature is assumed to reduce the need for HPs and thereby the costs for geothermal plants. The HP accounts for 29% of a geothermal plant costs [36], and it is assumed that 50%, 75% and 100% of this can be saved at 55 °C, 45 °C and 35 °C respectively. This is assuming that the geothermal heat source is above 35 °C, which is the case for all plants in Denmark [37].

2.6.6. Industrial Excess Heat

Excess heat from industrial processes can be used for DH supply either using HPs or via direct heat exchange. Direct heat exchange requires the DH supply temperature to be lower than the one for the excess heat. In [38] it has been assessed that 4 PJ of low temperature excess heat can be recovered using HP at today's temperature sets. Following this, it is in this study assumed that 25%, 50% and 75% of this can be recovered for DH supply in direct heat exchange, as the supply temperature is reduced to 55 °C, 45 °C and 35 °C respectively.

2.7. Required Production Capacity

An indirect effect of improved efficiencies and reduced demand in the DH system is the change in the required production capacity, due to changes in peak demand and utilisation time of the conversion units. This is done to include the potential change in investment costs related to production facilities and thereby making the scenarios economically comparable. The changes are performed iteratively to make all parameters match the requirements in the results of the final simulation. The following list presents all capacities that have been updated and how these have been updated.

- **Fuel boilers** in DH systems have been adjusted in capacity relative to the change in peak heat demand.
- **Condensing power plants** have been adjusted relative to peak electricity demand. This is only relevant in the Ultra and HP scenarios, where there is an increase in electricity demand.
- **CHP plants** have been adjusted in capacity relative to the number of full load hours of the plants.
- **HPs** have been adjusted in capacity relative to the number of full load hours of the plants.
- **Offshore wind power** capacity has been adjusted to generate the same amount of excess electricity as in the Low scenario.

3. Results


An overview of the analysed scenarios and the main results are presented in Table 5. The results will be further elaborated in the following.

Table 5: Overview of central scenario parameters and results.

	2035					2050				
	Save	Ret	Low	Ultra	HP	Save	Ret	Low	Ultra	HP
Temperature set [°C]	80/40	80/25	55/25	45/25	35/20	80/40	80/25	55/25	45/25	35/20
Additional DHW preparation method	-	-	-	Direct elec.	Boost-er HP	-	-	-	Direct elec.	Boost-er HP
Electricity consumption in DHW preparation [TWh]	0	0	0	0.5	0.6	0	0	0	0.6	0.7
Grid loss share [%]	16.5	15.8	14.1	13.2	12.3	14.7	14.1	12.4	11.4	10.5
Total DH Supply [TWh]	30.2	29.9	29.4	28.4	28.9	26.5	26.3	25.8	24.9	25.5
Total energy system costs [B€]	13.28	13.27	13.23	13.24	13.33	13.88	13.84	13.86	13.97	13.84
- Reduction in energy system costs [M€]	-	11	48	35	-50	-	79	123	98	-6
Total PES [TWh]	138.9	138.4	138.3	138.7	138.7	133.5	133.1	132.8	133.2	133.4
- Reduction in PES [TWh]	-	0.46	0.59	0.21	0.20	-	0.35	0.67	0.34	0.10


In Figure 4 it is shown how the DH production mix is changing between the scenarios. It can be seen that excess heat production is increasing, due to improved efficiencies, and at the same time CHP and HP production is decreasing as a consequence of this. It can also be seen that the surplus production (the production above the DH supply markers) is increasing with reduced temperatures, which is caused by the increase of inflexible heat production in the low heating season from waste, excess heat, geothermal and solar thermal heat production.

The surplus heat will materialise in a reduced supply of excess heat from industries or cooling via sea water, cooling tower or similar. The increasing surplus heat may indicate a potential for optimisation of the heat source mix. In the scenarios with low temperatures, the boiler, HP and CHP operates very few hours during the summer, but there is still an overproduction of heat.

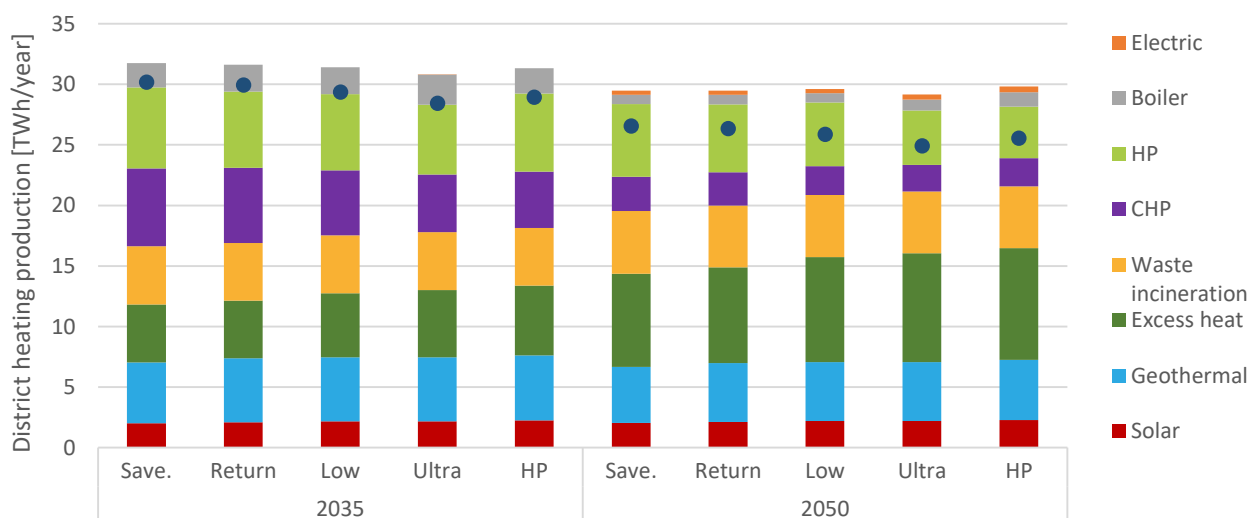

370 *Figure 4: Distribution of district heating production between production units for the five analysed*
 371 *scenarios, in 2035 and 2050.*

372 The primary energy supply (PES) seen in Figure 5, shows the total changes as a result of all changes in
 373 the scenarios. It can be seen that reduction of supply and return temperatures does not influence the PES
 374 or fuel consumption significantly. The reduction in PES is in all scenarios less than 0.7 TWh, with the
 375 lowest total fuel consumption and PES in the Low scenario compared to the Heat Savings scenario. When
 376 the PES of these five scenarios are compared to the DEA Wind scenario, it can be seen that a significant
 377 saving is obtained. This is due to the applied measures in the IDA scenarios that make use of synergies in
 378 the integration of energy sectors.

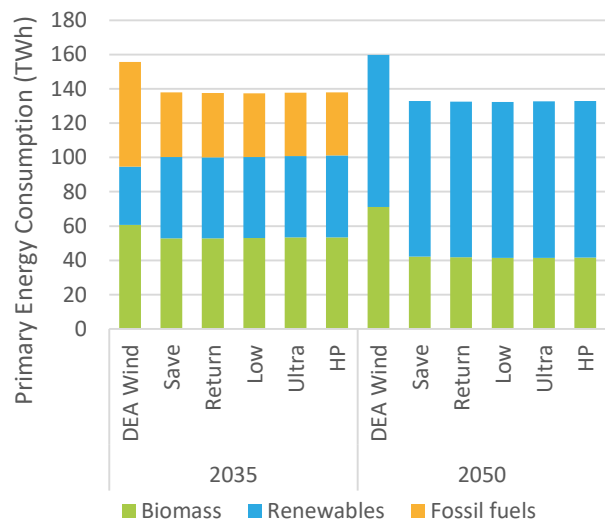

379
 380 *Figure 5: Primary energy supply in the five analysed scenarios and the DEA Wind Scenario, for 2035 and*
 381 *2050, divided on biomass, fluctuating renewables and fossil fuels.*

382 Figure 6 shows the overall economic results of the scenarios where a breakdown of the costs into Variable
 383 costs (fuel and variable operation costs), Operation costs (fixed operation costs) and Investment costs.
 384 The results show that the scenarios Return, Low and Ultra all are economically feasible compared to the
 385 Heat Savings scenario, and that the Low scenario has the lowest costs in both 2035 and 2050. The HP
 386 scenario has higher costs than the Heat Savings scenario under the given assumptions. This is mainly
 387 due to the investment costs in the individual HPs. As a sensitivity analysis, different fuel cost levels are
 388 included in the analysis, as seen in the figure.

389

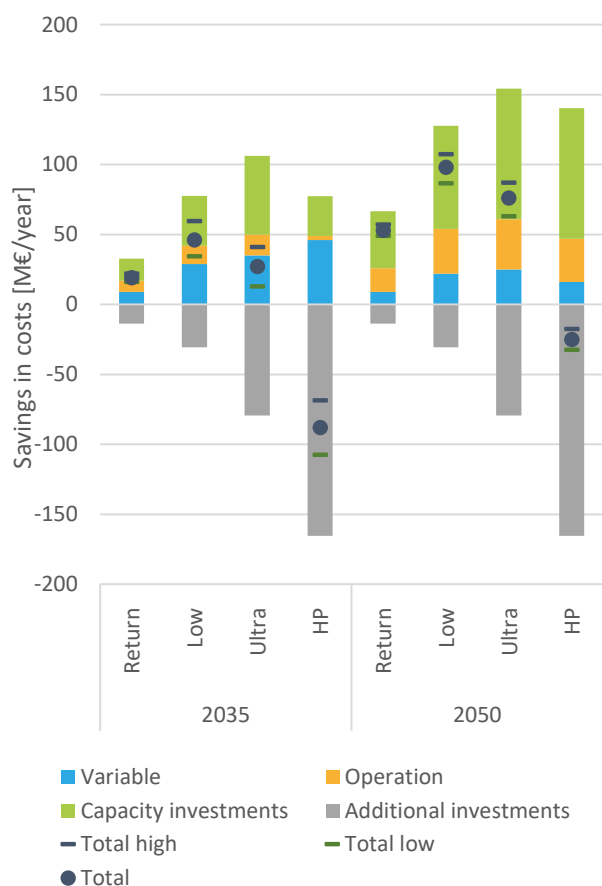


Figure 6: Savings in total costs, divided on Variable costs, Operation and maintenance costs and Investment costs, for the four alternative scenarios relative to the Heat Savings scenario for 2035 and 2050. The sensitivity of the results to high (+50%) and low (-50%) fuel costs is shown compared to the total costs.

4. Discussion and Conclusion

The feasibility found in this analysis is based on socioeconomy, but this does not mean that these solutions are also business economically feasible to a DH company. The results should be seen as guidelines to policymakers designing the concrete economic framework for DH development. The results apply on a general level for Denmark, but there will most likely be DH areas that make exceptions from the general conclusions, given specific conditions making them different from a typical case.

4.1. Reduction of Temperature Set

The results show that reducing temperatures in DH is a feasible strategy on the medium and even more on the longer term, in a transition towards more RE in Denmark. The results indicate that a reduction of return temperatures alone, considering the required investments, is a feasible strategy already today and increasingly with more RE penetration. In the 2050 model the savings are seven times larger than the additional investments. This is at the same time a prerequisite for a substantial reduction of the supply temperature. As the supply temperature is reduced towards the level where electric boosting of the DHW temperature is required, the costs keeps decreasing. From here, through the Ultra and HP scenarios, the costs increase because the additional investments surpass the savings.

4.2. Significance of Investment Costs

It can be noticed in the results that a reduction in fuel consumption, which might intuitively be the reason to introduce LTDH, is not actually the main benefit on the system level. In all scenarios, except the Return scenario for 2035, the reductions in capacity investments are larger than the variable and operational costs together. As seen in Figure 6, the reductions in capacity investments are increasing until they peak in the Ultra scenario and are lower in the HP scenario, whereas the additional investments have an exponentially increasing tendency through the scenarios. This indicates that a theoretical

416 optimum exists in how low the temperature should be. This is also what can be seen in the trend of the
417 reduction in total cost which peaks in the Low scenario under the given assumptions.

418 4.3. Electricity for Domestic Hot Water Boosting

419 The two scenarios that use electricity for boosting of the temperature of the DHW show lower reduction in
420 socioeconomic costs, and the Low scenario without electricity use for DHW therefore seems like the most
421 feasible strategy. As mentioned, the investment costs are of great importance to the results. The total
422 socioeconomic savings are 100 and 75 M€/year for the DH supply systems in Denmark for the Low and
423 Ultra scenarios respectively. The calculated additional investment costs for the electric heaters are 37
424 M€/year, and if the costs of these can be reduced by two thirds, the scenarios would be economically on
425 the same level. On the other hand, if the increase in pipe costs is larger than assumed here, the results
426 will tip more in favour of the Low scenario. Because of the high additional costs in the HP scenario and
427 the relatively low increase of the system benefits this is not seen as an option that can be feasible in
428 general. The HP solution might be feasible in concrete cases under the right circumstances, though.

429 If the costs of the Low and Ultra scenarios would be on the same level, there is still a risk in the Ultra
430 scenario, because the larger investments in the buildings lock the demand to that solution. If these
431 investments are made it is still possible to operate at higher temperatures, but then the investments
432 have been wasted. If an additional unit is added to the DH substation, an electric heater or especially a
433 booster HP, it will also increase the need for maintenance and the risk for errors. The Low scenario is
434 more simple in the sense that it only requires investments that would be feasible anyway and thereby
435 nothing is wasted if the temperatures are not reduced as much or as fast as planned.

436 4.4. Synergy between LTDH and Savings in Space Heating

437 One important assumption in this study is the implementation of savings in SH of approximately 45% in
438 existing buildings [17] and new buildings following the building codes with low SH demands as well. In
439 this study, only modest changes in the cost for the DH grid are included because the assumed heat
440 savings enable a reduction in temperature difference between DH supply and return. If no savings in SH
441 are implemented, the temperature difference between supply and return cannot be reduced as much as
442 suggested in this study, and thereby the benefits cannot be achieved either. Alternatively, significantly
443 higher costs in DH grid investments will have to be considered to account for the higher flow needed to
444 cover the demand.

445 4.5. Sensitivity of the Results

446 The sensitivity of the results to a number of important parameters have been analysed. The costs for the
447 household investments and electricity consumption in DHW boosting are relatively uncertain, because no
448 large-scale implementation have been done, but the values assumed are rather optimistic. Therefore, the
449 costs and electricity consumption will more likely be higher in the Ultra and HP scenarios, making these
450 less feasible compared to the others. In Figure 6, the sensitivity to fuel price changes is presented. These
451 changes in fuel costs can change the relation between the savings in the scenarios, but not the overall
452 results. The same tendency can be seen when altering the applied interest rate and, in the 2035 case,
453 the CO₂-price.

454 In this study the IDA models of Denmark in 2035 and 2050 are assumed as starting points for the
455 scenario analyses. The pace of the transition towards 100% RE do not influence the conclusions, since
456 the relations between the scenarios are similar in 2035 and 2050. If the development goes in a
457 completely different direction than proposed in the IDA Energy Vision [17], the results may not be
458 representative.

459 4.6. Conclusion

460 It can be concluded that it is a feasible strategy to reduce DH temperatures on medium and long term in
461 the development towards a RE system. To reduce the return temperature to about 25 °C requires
462 replacement and adjustment of the building heating systems, but this is feasible to do so, even if the
463 supply temperature is not reduced, with an annual reduction of socioeconomic costs of 50 M€/year in
464 2050 for the DH supply system in Denmark. The supply temperature should be reduced as much as
465 possible until electric boosting of DHW becomes necessary, which happens at about 55 °C and gives an
466 annual reduction in socioeconomic costs of about 100 M€/year. The feasibility on a general level of a
467 further temperature reduction to e.g. 45 °C, taking local temperature boosting of DHW into account, is

468 very questionable and will rely on a very low investment cost in the units to heat the DHW. A solution
469 with micro HPs for temperature boosting seems beyond realistic from an economic perspective, but under
470 the right circumstances in small concrete areas it might be feasible. Before considering electric boosting
471 of temperatures, organisational issues related to trade-offs between benefits for the DH company of
472 reduced temperature and the increased costs for electricity for the consumers have to be solved.

473 Acknowledgement

474 The authors would like to thank Jesper Skovhus Andersen, manager at Ringkøbing Fjernvarme for
475 delivering valuable data and Christian Nørr Jacobsen and Kasper Qvist, DH specialists at SWECO for
476 providing important insights from their LTDH project.

477 The work presented in this paper is a result of the research activities of the Strategic Research Centre for
478 4th Generation District Heating (4DH) which has received funding from The Innovation Fund Denmark.

479 References

- 480 [1] Lund H, Werner S, Wiltshire R, Svendsen S, Thorsen JE, Hvelplund F, et al. 4th Generation District
481 Heating (4GDH): Integrating smart thermal grids into future sustainable energy systems. *Energy*
482 2014;68:1–11. <http://dx.doi.org/10.1016/j.energy.2014.02.089>.
- 483 [2] Connolly D, Mathiesen BV. A technical and economic analysis of one potential pathway to a 100%
484 renewable energy system. *Int J Sustain Energy Plan Manag* 2014;1:7–28.
485 <http://dx.doi.org/10.5278/ijsepm.2014.1.2>.
- 486 [3] Mathiesen BV, Lund H, Connolly D, Wenzel H, Østergaard PA, Möller B, et al. Smart Energy
487 Systems for coherent 100% renewable energy and transport solutions. *Appl Energy*
488 2015;145:139–54. <http://dx.doi.org/10.1016/j.apenergy.2015.01.075>.
- 489 [4] Dalla Rosa A, Boulter R, Church K, Svendsen S. District heating (DH) network design and
490 operation toward a system-wide methodology for optimizing renewable energy solutions
491 (SMORES) in Canada: A case study. 24th Int Conf Effic Cost, Optim Simul Environ Impact Energy,
492 ECOS 2011 2012;45:960–74. <http://dx.doi.org/10.1016/j.energy.2012.06.062>.
- 493 [5] Ommen T, Markussen WB, Elmegaard B. Lowering district heating temperatures – Impact to
494 system performance in current and future Danish energy scenarios. *Energy* 2016;94:273–91.
495 <http://dx.doi.org/10.1016/j.energy.2015.10.063>.
- 496 [6] Köfinger M, Basciotti D, Schmidt RR, Meissner E, Doczekal C, Giovannini A. Low temperature
497 district heating in Austria: Energetic, ecologic and economic comparison of four case studies.
498 *Energy* 2016;110:95–104. <http://dx.doi.org/10.1016/j.energy.2015.12.103>.
- 499 [7] Baldvinsson I, Nakata T. A feasibility and performance assessment of a low temperature district
500 heating system – A North Japanese case study. *Energy* 2016;95:155–74.
501 <http://dx.doi.org/10.1016/j.energy.2015.11.057>.
- 502 [8] Gadd H, Werner S. Achieving low return temperatures from district heating substations. *Appl*
503 *Energy* 2014;136:59–67. <http://dx.doi.org/10.1016/j.apenergy.2014.09.022>.
- 504 [9] Tol Hĭ, Svendsen S. Effects of boosting the supply temperature on pipe dimensions of low-energy
505 district heating networks: A case study in Gladsaxe, Denmark. *Energy Build* 2015;88:324–34.
506 <http://dx.doi.org/10.1016/j.enbuild.2014.10.067>.
- 507 [10] Østergaard DS, Svendsen S. Theoretical overview of heating power and necessary heating supply
508 temperatures in typical Danish single-family houses from the 1900s. *Energy Build* 2016;126:375–
509 83. <http://dx.doi.org/10.1016/j.enbuild.2016.05.034>.
- 510 [11] Yang X, Li H, Svendsen S. Alternative solutions for inhibiting Legionella in domestic hot water
511 systems based on low-temperature district heating. *Build Serv Eng Res Technol* 2016;37:468–78.
512 <http://dx.doi.org/10.1177/0143624415613945>.
- 513 [12] Yang X, Li H, Svendsen S. Evaluations of different domestic hot water preparing methods with
514 ultra-low-temperature district heating. *Energy* 2016;109:248–59.
515 <http://dx.doi.org/10.1016/j.energy.2016.04.109>.

- 516 [13] Østergaard PA, Andersen AN. Booster heat pumps and central heat pumps in district heating. Appl
517 Energy 2016. <http://dx.doi.org/10.1016/j.apenergy.2016.02.144>.
- 518 [14] Jacobsen CN, Qvist K, Iversen J. Demonstrationsprojekter om varmepumper eller andre VE -
519 baserede opvarmningsformer. Demoprojekt nr. 2: Lavtemperaturfjernvarme (Demonstration
520 project on low temperature district heating). 2015.
521 [https://ens.dk/sites/ens.dk/files/Energibesparelser/demoprojekt_2_-](https://ens.dk/sites/ens.dk/files/Energibesparelser/demoprojekt_2_-_lavtemperaturfjernvarme_ltfv.pdf)
522 [_lavtemperaturfjernvarme_ltfv.pdf](https://ens.dk/sites/ens.dk/files/Energibesparelser/demoprojekt_2_-_lavtemperaturfjernvarme_ltfv.pdf)
- 523 [15] Pukšec T, Vad Mathiesen B, Duić N. Potentials for energy savings and long term energy demand of
524 Croatian households sector. Appl Energy 2013;101:15–25.
525 <http://dx.doi.org/10.1016/j.apenergy.2012.04.023>.
- 526 [16] Bidaj F, Alushaj R, Prifti L, Chittum A. Evaluation of the heating share of household electricity
527 consumption using statistical analysis: a case study of Tirana, Albania. Int J Sustain Energy Plan
528 Manag 2015;5:3–14. <http://dx.doi.org/10.5278/ijsepm.2015.5.2>.
- 529 [17] Mathiesen BV, Lund H, Hansen K, Ridjan I, Djørup S, Nielsen S, et al. IDA's Energy Vision 2050.
530 Aalborg University; 2015.
531 http://vbn.aau.dk/files/222230514/Main_Report_IDAs_Energy_Vision_2050.pdf
- 532 [18] Yang X, Li H, Svendsen S. Modelling and multi-scenario analysis for electric heat tracing system
533 combined with low temperature district heating for domestic hot water supply. Build Simul
534 2016;9:141–51. <http://dx.doi.org/10.1007/s12273-015-0261-4>.
- 535 [19] Hedegaard K, Mathiesen BV, Lund H, Heiselberg P. Wind power integration using individual heat
536 pumps – Analysis of different heat storage options. Energy 2012;47:284–93.
537 <http://dx.doi.org/10.1016/j.energy.2012.09.030>.
- 538 [20] Østergaard DS, Svendsen S. Experiences from a practical test with low-temperature district
539 heating for space heating in 5 existing single-family houses from the 1930s (In Review). Energy
540 2017:Startpage-Endpage.
- 541 [21] Completvvs.dk. Metromini 18 El-gennemstrømningsvandvarmer 2016.
542 <https://www.completvvs.dk/metromini-18-el-gennemstroemnings-vandvarmer/> (accessed
543 November 11, 2016).
- 544 [22] Lund R, Mohammadi S. Choice of insulation standard for pipe networks in 4th generation district
545 heating systems. Appl Therm Eng 2016;98:256–64.
546 <http://dx.doi.org/10.1016/j.applthermaleng.2015.12.015>.
- 547 [23] Danish Energy Agency. Technology Data for Energy Plants: Individual Heating Plants and Energy
548 Transport. Danish Energy Agency and Energinet.dk; 2012.
549 [https://ens.dk/sites/ens.dk/files/Analyser/old_technology_data_for_individual_heating_plants_an](https://ens.dk/sites/ens.dk/files/Analyser/old_technology_data_for_individual_heating_plants_and_energy_transport_aug2016.pdf)
550 [d_energy_transport_aug2016.pdf](https://ens.dk/sites/ens.dk/files/Analyser/old_technology_data_for_individual_heating_plants_and_energy_transport_aug2016.pdf)
- 551 [24] Waenn A, Connolly D, Ó Gallachóir B. Investigating 100% renewable energy supply at regional
552 level using scenario analysis. Int J Sustain Energy Plan Manag 2014;3:21–32.
553 <http://dx.doi.org/10.5278/ijsepm.2014.3.3>.
- 554 [25] Lund H. EnergyPLAN - Advanced Energy Systems Analysis Computer Model. Documentation
555 Version 12 2015. <http://www.energyplan.eu/> (accessed October 17, 2016).
- 556 [26] Mathiesen BV, Drysdale D, Lund H, Paardekooper S, Ridjan I, Connolly D, et al. Future Green
557 Buildings - A key to Cost-Effective Sustainable Energy Systems. Aalborg, Denmark: 2016.
558 [http://vbn.aau.dk/files/234005850/Future_Green_Buildings_A_key_to_cost_effective_sustainable](http://vbn.aau.dk/files/234005850/Future_Green_Buildings_A_key_to_cost_effective_sustainable_energy_systems_ENGLISH.pdf)
559 [_energy_systems_ENGLISH.pdf](http://vbn.aau.dk/files/234005850/Future_Green_Buildings_A_key_to_cost_effective_sustainable_energy_systems_ENGLISH.pdf)
- 560 [27] Mohammadi S, Bojesen C, Muff MV. A modeling approach for district heating systems with focus
561 on transient heat transfer in pipe networks – A case study in Studstrup, Denmark. 28th Int. Conf.
562 Effic. Costs, Optim. Simul. Environ. Impact Energy Syst., Pau: 2015.
- 563 [28] Hansen LT. Røggaskondensering ved hjælp af absorptionsprincippet, teknologi og produktprogram
564 (Flue gas condensation using the absorption principle, technology and product program) 2009.

- 565 [29] Çengel YA, Boles MA. Thermodynamics : an engineering approach. 8th ed. New York: McGraw-Hill
566 Education; 2015.
- 567 [30] Sofrata HM. Carnot and Lorenz cycles for dual absorption system. Wärme - Und Stoffübertragung
568 1993;28:107–16. <http://dx.doi.org/10.1007/BF01541106>.
- 569 [31] Fossing H. Sea water temperature measurements. 2014.
- 570 [32] Lund R, Persson U. Mapping of potential heat sources for heat pumps for district heating in
571 Denmark. Energy 2016;110:129–38. <http://dx.doi.org/10.1016/j.energy.2015.12.127>.
- 572 [33] EMD International A/S. User's Guide - energyPRO. 2013.
573 [http://emd.dk/energyPRO/Tutorials%20and%20How%20To%20Guides/energyPROHlpEng-](http://emd.dk/energyPRO/Tutorials%20and%20How%20To%20Guides/energyPROHlpEng-4.4%20Apr.16.pdf)
574 [4.4%20Apr.16.pdf](http://emd.dk/energyPRO/Tutorials%20and%20How%20To%20Guides/energyPROHlpEng-4.4%20Apr.16.pdf)
- 575 [34] Danish Energy Agency. Store varmepumper i fjernvarmeforsyningen. Copenhagen, Danmark:
576 2016.
577 [https://ens.dk/sites/ens.dk/files/Varme/store_varmepumper_i_fjernvarmeforsyningen_endelig_ud](https://ens.dk/sites/ens.dk/files/Varme/store_varmepumper_i_fjernvarmeforsyningen_endelig_udgave.pdf)
578 [gave.pdf](https://ens.dk/sites/ens.dk/files/Varme/store_varmepumper_i_fjernvarmeforsyningen_endelig_udgave.pdf)
- 579 [35] Brand M, Thorsen JE, Svendsen S. Numerical modelling and experimental measurements for a
580 low-temperature district heating substation for instantaneous preparation of DHW with respect to
581 service pipes. Energy 2012;41:392–400. <http://dx.doi.org/10.1016/j.energy.2012.02.061>.
- 582 [36] Danish Energy Agency. Technology Data for Energy Plants. Generation of Electricity and District
583 Heating, Energy Storage and Energy Carrier Generation and Conversion. - certain updates made
584 October 2013, January 2014 and March 2015 - 9 chapters updated in August 2016. Copenhagen:
585 2015. https://ens.dk/sites/ens.dk/files/Analyser/teknologikatalog_august_2016_08082016.pdf
- 586 [37] Lorenzen SB. Drejebog om geotermi: Etablering og drift af geotermiske anlæg til
587 fjernvarmeforsyning (Establishment and operation of geothermal plants for district heating
588 supply). Kolding, Denmark: 2014.
589 <http://www.geotermi.dk/media/2156238/Drejebogforgeotermi20140121.pdf>
- 590 [38] Sørensen PA, Paaske BL, Jacobsen LH, Hofmeiseter M. Udredning vedrørende
591 varmelagringsteknologier og store varmepumper i fjernvarmesystemet. The Danish Energy
592 Agency; 2013. https://issuu.com/planenergi.dk/docs/udredning_vedr_rende_varmelagrings
- 593